


THD 10%
91%
: 4kV 6kV

Class I

&

IP66

5

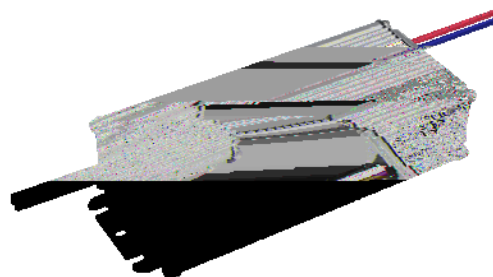


EDC-100S105ST-000x


100W IP66

140-305 Vac

| | (1)(2) | | | (3) | (3) | |
|---------|---------------|--------------|-------|-------|------|--------------------|
| 700 mA | 140 ~ 305 Vac | 71 ~ 143 Vdc | 100 W | 91.0% | 0.96 | EDC-100S105ST-0007 |
| 860 mA | 140 ~ 305 Vac | 58 ~ 116 Vdc | 100 W | 90.5% | 0.96 | EDC-100S105ST-0004 |
| 1050 mA | 140 ~ 305 Vac | 47 ~ 95 Vdc | 100 W | 90.0% | 0.96 | EDC-100S105ST |


- 1 : 220-240Vac
- 2 100-305Vac 100-140Vac
- 3 220 Vac

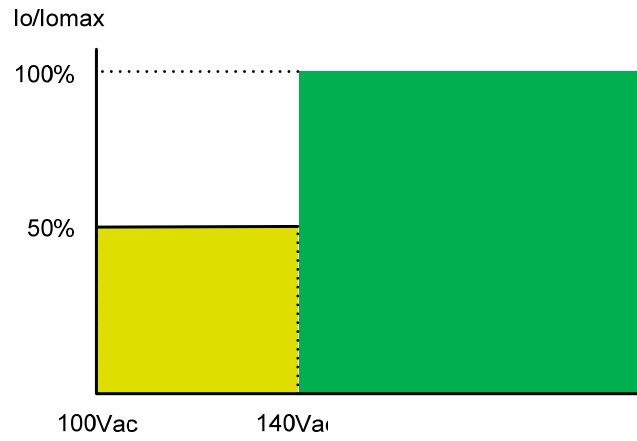

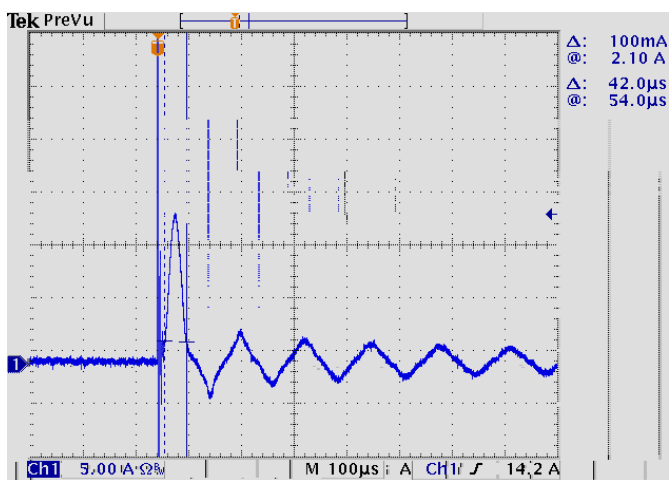


EDC-100S105ST($I_o=1050\text{mA}$)

效率 vs. 输出电压

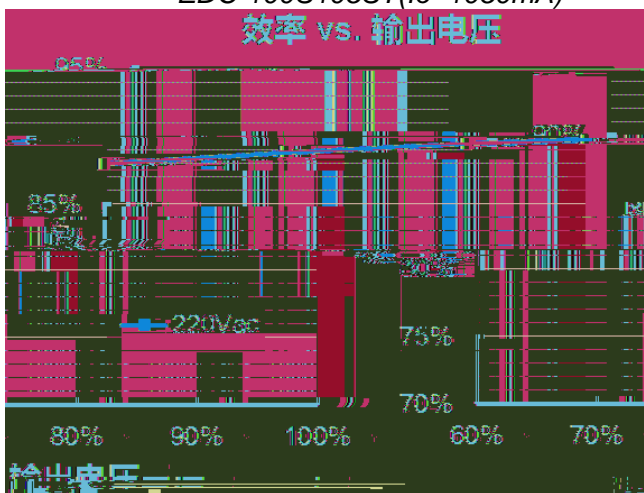


EDC-100S105ST-0004($I_o=860\text{mA}$)



效率 vs. 输出电压

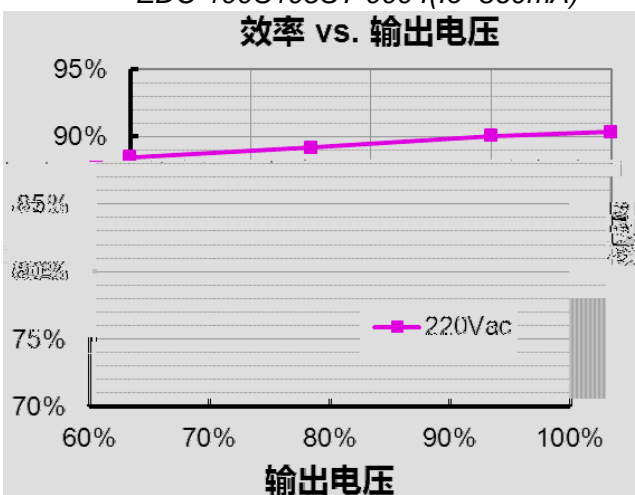


EDC-100S105ST-0007($I_o=700\text{mA}$)

效率 vs. 输出电压

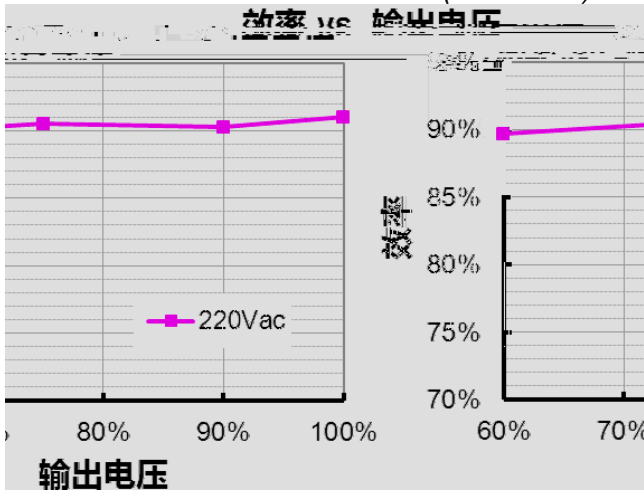



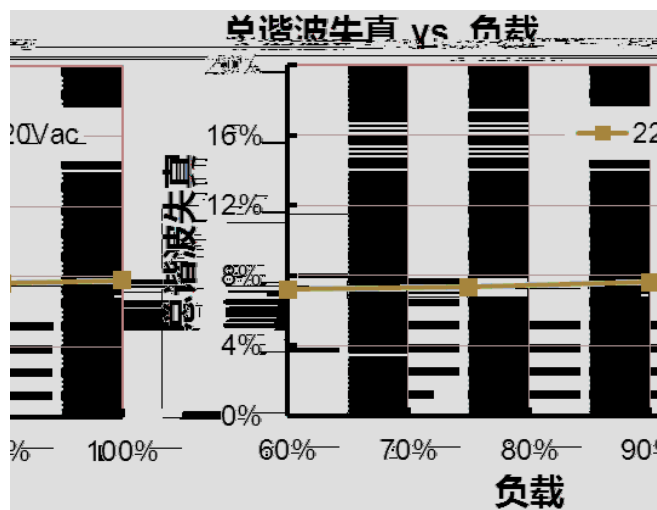
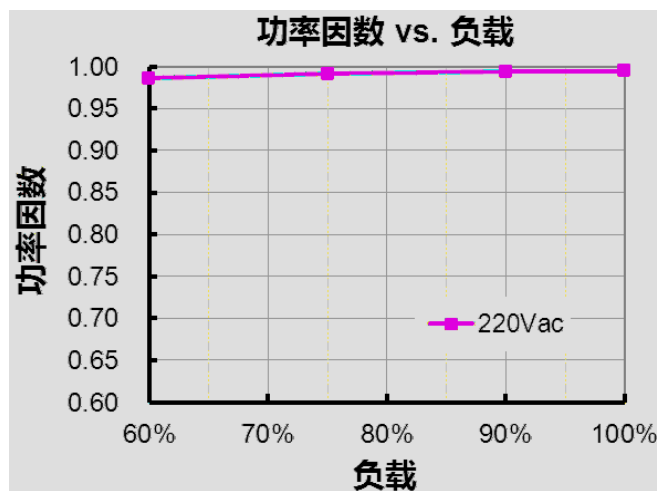


| | | | | |
|--|--|--|--|--|
| | | | | |
|--|--|--|--|--|



| | | | | | | |
|--|--|---|---|---------|--------|----|
| | | | | | | |
| | | - | - | 440 Vac | 440Vac | 48 |

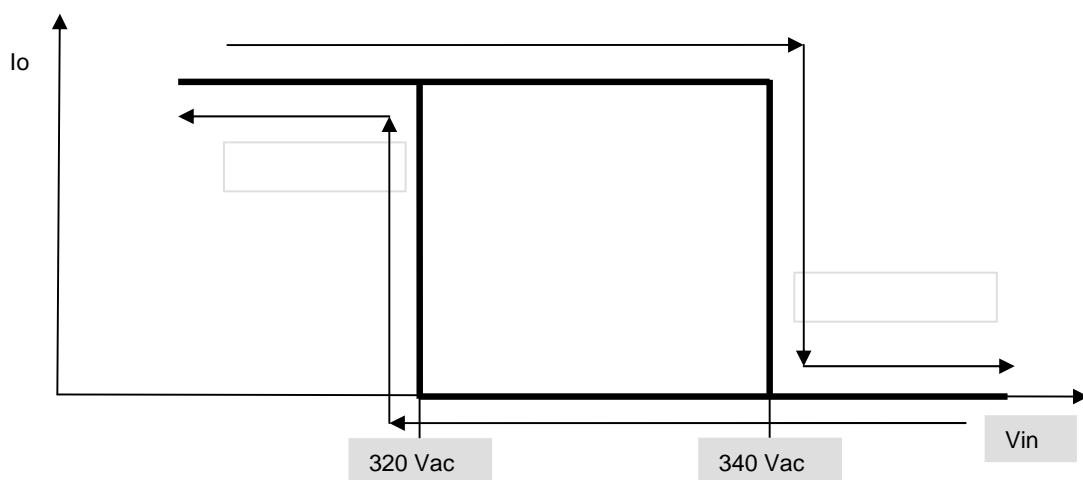

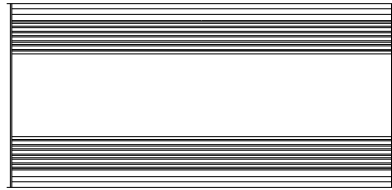



EDC-100S105ST-000x

Rev. A

100W IP66

| | | | | |
|------------|---|--|---|---|
| | | | | |
| | | | | |
| 2017-10-13 | A | | / | / |